


# Easy Release PVC Protection Tape

## TECHNICAL DATA SHEET

### PRODUCT: A510

**PROPERTIES:** A 130 micron easy release PVC tape with a coating of rubber based pressure sensitive adhesive on one side. The product adheres well to both glass and aluminium and removes cleanly with no adhesive residue for up to 4 months.

**FEATURES:** The product is specially coated to allow an easy unwind whilst retaining its excellent medium tack properties. The easy unwind allows the product to be applied in wide widths (up to 1250mm).

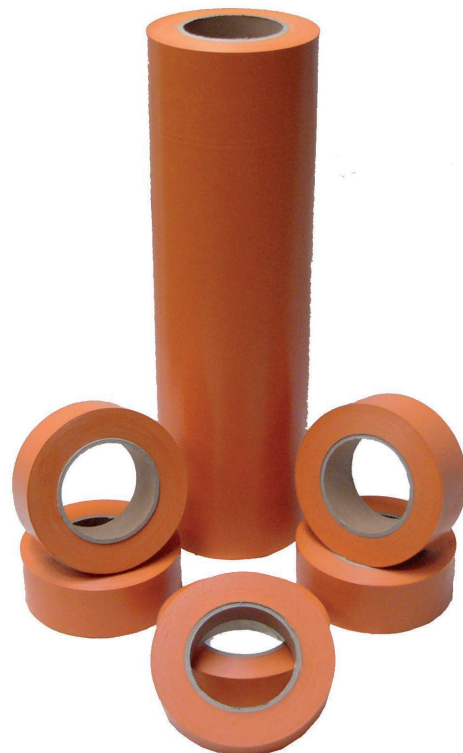

**APPLICATIONS:** Ideal for heavy duty protection of:

- Aluminium frames during transportation and installation
- A wide variety of metals, painted steel and sheeting
- Construction - particularly where bricklaying or rendering is involved

### TECHNICAL PERFORMANCE

Description	Units	Value	Test Method
Tape Thickness	mm/mils	0.130 / 5.0	PSTC-133
Adhesion to Steel	kg/cm, oz/in	0.12/11	ATSM D-1000
Elongation at break	%	180	PSTC-131
Tensile Strength	kg/cm, lbs/in	2.1/11	PSTC-131

This product should be applied to a clean and dry surface. The adhesive of the product must not be exposed direct to the sunlight when applied. The above figures represent average values. The selection of a tape is the responsibility of the buyer. Tape should be stored at room temperature and should not be exposed to sunlight. We reserve the right to make changes without notice to our product and specifications.